

WOOD LOOK

Treverklife



MARAZZI




Treverklife

Treverklife brings the authentic character of oak to ceramic surfaces, inspired by the distinctive Venetian briccole and their textured, time-worn look. The collection comes in three warm shades — Honey, Cherry and Walnut — and in two formats, 25x150 and 20x120, ideal for natural and welcoming spaces. The Industrial décor and hexagon mosaic complete the range, offering versatile decorative solutions. A collection that blends atmosphere, materiality and performance for contemporary interiors.





MQYN Treverklife Cherry Rt 20x120cm
MOUP D_Segni Macro 1 Caldi 20x20cm

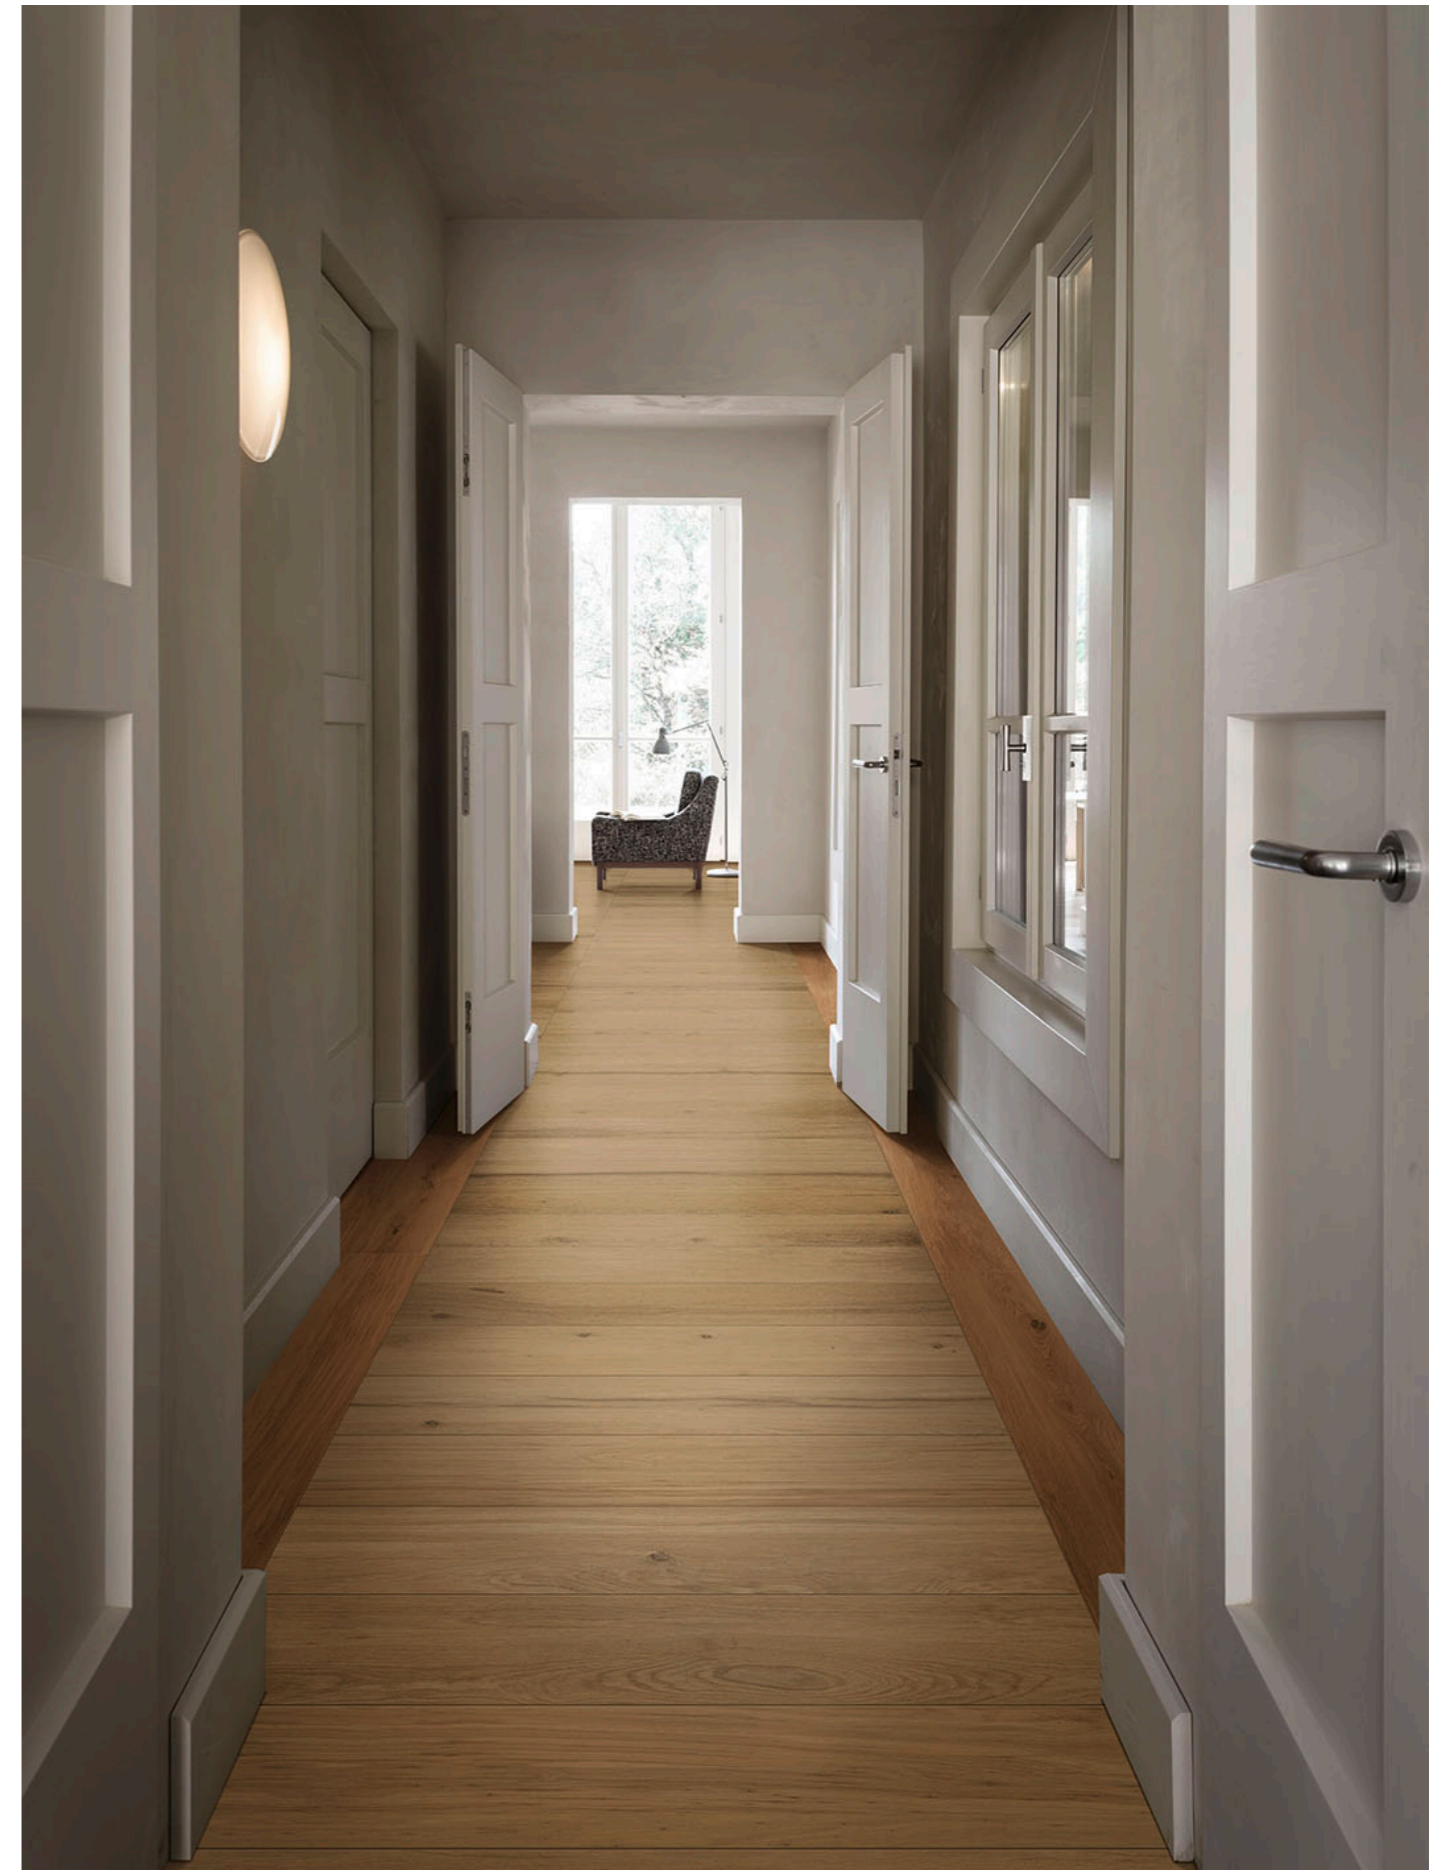

MQYP Treverklife Walnut Rt 20x120cm
MQYN Treverklife Cherry Rt 20x120cm



M4P7 Marbleplay Str Mikado Travertino 30x90cm
M4NY Marbleplay Travertino Rt 30x90cm

MQYN Treverklife Cherry Rt 20x120cm
M4PT Marbleplay Mosaico Travertino 30x30cm





MQYQ Treverklife Honey Rt 25x150cm
MOKP Treverklife Mosaico Mix 35x35cm







Treverklife Index


Treverklife

- Colorbody Fine Porcelain Stoneware




Cherry

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
20x120cm	Natural	MQYN	Treverklife Cherry Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	H	V3	3	0,72	14,75	60	43,20	884,88
25x150cm	Natural	MQYR	Treverklife Cherry Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	H	V3	3	1,13	23,31	45	50,63	1.048,79




Honey

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
20x120cm	Natural	MQYM	Treverklife Honey Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	H	V3	3	0,72	13,31	60	43,20	798,52
25x150cm	Natural	MQYQ	Treverklife Honey Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	H	V3	3	1,13	22,78	45	50,63	1.025,21



Walnut

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
20x120cm	Natural	MQYP	Treverklife Walnut Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	G	V3	3	0,72	14,82	60	43,20	889,25
25x150cm	Natural	MQYS	Treverklife Walnut Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	G	V3	3	1,13	22,72	45	50,63	1.022,52



Industrial

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
20x120cm	Natural	MOX5	Treverklife Industrial	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall		R9	> 0.40	Class 1			>= 0.42	G	V3	3	0,72	14,29	60	43,20	857,14



Mosaico Mix Mix

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
35,5x35,9cm	Natural	MOKP	Treverklife Mosaico Mix	MM 10,5	.	Frost proof, Resistance deep abrasion	Floor & Wall									V3	6	0,52	9,00	48	24,76	432,00

Legenda

Destinazioni d'uso

D
Tiles suitable only for residential bathrooms and bedrooms; any type of abrasion must be avoided.

E
Tiles suitable for any room of a house except for entrance areas and kitchens. Low stress abrasive wear.

F
Tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.

G
Materials suitable for rooms subject to medium-heavy abrasion, such as detached houses and light-traffic commercial buildings.

H
Materials suitable for situations of relatively hard abrasion in environments without protection against scratching, both public and private.

Variazioni cromatiche

V0
Monochromatic - V0: tiles of the same shade are very uniform, in just one colour

V1
Uniform appearance - V1: uniform colour with only minimal differences between tiles in the same production run

V2
Slight variation - V2: clearly distinguishable differences in texture and pattern within the same production run

V3
Moderate variation - V3: significant variation in texture, pattern and colour from tile to tile within the same production run. The colour range should be viewed before selecting the material

V4
Substantial/random variation - V4: random differences from tile to tile. One tile may have totally different texture and colour from another. The colour range should be viewed before selecting the material

Certificazioni



ISO 14001



ISO 45001



ISO 9001



Green Building Council



GPP



EPD Italy



ISO 17889-1



Recycled Material



Greenguard Certification



LEED Credits



QBUPEC D+



FDES



Declare



HPD



CAM Sassuolo



CAM Finale Emilia



CCC



CE 001MRZI



CE 009MRZI



UKCA 001MRZUK



UKCA 009MRZUK



SASO

© Copyright by Marazzi Group S.r.l., 2023.
All rights reserved, Marazzi Group Srl a Socio Unico
Viale Regina Pacis, 39 41049 Sassuolo (MO) Italy
T +39 0536 860800 F +39 0536 860644
info@marazzi.it www.marazzi.it

La riproduzione dei colori è approssimativa. Le tabelle con i dati riferiti ai contenuti per scatole ed ai pesi degli imballi sono aggiornate al momento della stampa del catalogo, pertanto i dati elencati possono subire variazioni.

Marazzi Group ha la facoltà esclusiva di modificare e sostituire, anche solo parzialmente i componenti dei sistemi illustrati in questo folder, senza l'obbligo di darne preavviso.



MARAZZI